

## Podešavanja Allied Telesyn AT AR-255E

Otvorite *Internet Explorer* ili neki drugi web čitač i u polje *Address* ukucajte adresu <http://192.168.1.1>. Kada budete upitani za *username* i *password* ukucajte za *username manager*, a za *password friend* i kliknite na dugme *OK*.



AT-AR255E User


User name:

Password:


Remember my password

OK Cancel

Kada ukucate *username* i *password* pojaviće se novi prozor. Iz menija sa leve strane odaberite stavku *Advanced Configuration*.

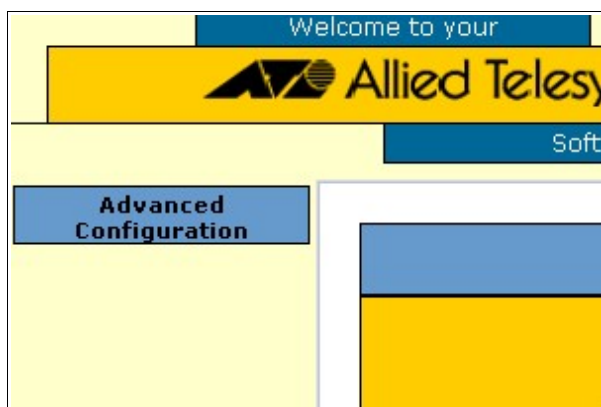

Kada se otvori novi meni, odaberite stavku *Security*. Nakon toga nadjite red u kome piše *NAT* i kliknite na dugme *Configure*.



U meniju *NAT Configuration* kliknite na dugme *Configure*.



Kliknite na opciju *Disable NAT to internal interfaces* i na kraju kliknite na dugme *Back to security page*.

Disable NAT to internal interfaces
No Global Address Pools Defined
Add Global Address Pool
No Reserved Mappings Defined
Add Reserved Mapping
Back to Security page

Kada se vratite na *Security* meni, u redu *Firewall* odaberite opciju *Disabled* i kliknite na dugme *Apply*. Posle toga

Security		
Enabled	<input checked="" type="radio"/>	Disabled
<u>Firewall</u>	<input type="radio"/> Enabled	<input checked="" type="radio"/> Disabled
<u>Dynamic Port Opening</u>		
<u>Attack Detection and Blocking</u>	<input type="radio"/> Enabled	<input checked="" type="radio"/> Disabled
<u>NAT</u>		
Apply		

U *Interfaces List* sekciji najдите red u kome za *Type* piše **external** i kliknite na dugme *Delete* u tom redu, a zatim kliknite na dugme *Confirm delete*.

Interfaces List	
Type	Action
internal	Delete
external	Delete

Nakon ovoga, iz menija sa leve strane odaberite stavku *ADSL*. Kada se nadjete u podešavanjima za *ADSL*, kliknite na dugme *Delete* u listi postojećih konekcija. Sada pristupamo pravljenju nove *ADSL* konekcije na *ADSL* ruteru.

<u>ADSL Configuration</u>		
<b>Connection List</b>		
Action	Name	Creator
<b><u>ATM Channel Parameters</u></b>		
Name	Gama	VPI 8 VCI 35
<b><u>ATM Quality of Service Parameters</u></b>		
Peak Cell Rate 2000		
UBR <input checked="" type="radio"/>	CBR <input type="radio"/>	
VBRrt <input type="radio"/>	VBRnrt <input type="radio"/>	Sustainable Cell Rate 1000
		Maximum Burst Size 2000
ABR <input type="radio"/>	QFC <input type="radio"/>	

U polje *Name* upišite ime za ADSL konekciju (u našem primeru to je tekst *Gama*). U polje *VPI* upišite broj **8**, a polje *VCI* upišite broj **35**. U sekciji *ATM Quality of Service Parameters* proverite da li je obeležena opcija **UBR**.

<u>Connection Type</u>		
<b>ADD</b>	<input type="radio"/> RFC 1483	Encapsulation <input type="text"/> Use DHCP <input checked="" type="checkbox"/> Global IP <input type="text"/> . <input type="text"/> . <input type="text"/> . <input type="text"/> Global Mask <input type="text"/> . <input type="text"/> . <input type="text"/> . <input type="text"/>
<b>ADD</b>	<input checked="" type="radio"/> PPP	Authentication Method <input type="radio"/> NONE <input checked="" type="radio"/> PAP <input type="radio"/> CHAP User name <input type="text" value="uhome@beograd.com"/> Password <input type="password" value="*****"/>
	<input type="checkbox"/> PPPoA	Encapsulation <input type="text"/> Global IP <input type="text"/> . <input type="text"/> . <input type="text"/> . <input type="text"/> Dynamic IP <input type="checkbox"/> AutoDNS discovery <input type="checkbox"/> Create as Default Route <input type="checkbox"/>
	<input checked="" type="checkbox"/> PPPoE	Global IP <input type="text"/> . <input type="text"/> . <input type="text"/> . <input type="text"/> Dynamic IP <input checked="" type="checkbox"/> AutoDNS discovery <input checked="" type="checkbox"/> Create as Default Route <input checked="" type="checkbox"/> Access concentrator <input type="text"/> Service name <input type="text"/>

U sekciji *Connection Type* odaberite opciju **PPP**, zatim za *Authentication Method* odaberite **PAP** i upišite Vaše korisničko ime i šifru u odgovarajuća polja. Nakon toga obeležite polje **PPPoE** i kliknite na dugme *Add* sa leve strane.

Nakon dodavanja konekcije, iz menija sa leve strane odaberite opciju *Save configuration* i nakon toga kliknite na dugme *Save*.

<b>Save configuration</b>
<b>Please confirm that you wish to save the configuration.</b>
<b>There will be a delay while saving as configuration information is written to flash.</b>
<input type="button" value="Save"/>